



# ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

**AALBORG WHITE D-CARB® CEM II/A-LL 52.5 R**  
**AALBORG PORTLAND A/S, CEMENTIR HOLDING**

Programme:  
International EPD System,  
[www.environdec.com](http://www.environdec.com)

Programme operator:  
**EPD International AB**

EPD registration  
number:  
**EPD-IES-0021592**

Publication  
date:  
**11-04-2025**

Valid until:  
**11-04-2030**

Geographical  
scope:  
**Global**

*An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com).*

# GENERAL INFORMATION

## MANUFACTURER INFORMATION

<b>Manufacturer</b>	Aalborg Portland A/S, Cementir Holding
<b>Address</b>	Aalborg Portland A/S, Rørdalsvej 44, 9220 Aalborg, Denmark
<b>Contact details</b>	<a href="mailto:cement@aalborgportland.dk">cement@aalborgportland.dk</a>
<b>Website</b>	<a href="http://www.aalborgportland.dk">www.aalborgportland.dk</a>

## PRODUCT IDENTIFICATION

<b>Product name</b>	Aalborg White D-Carb®
<b>Additional label(s)</b>	CEM II/A-LL 52,5 R
<b>Product number / reference</b>	0615-CPR-9806.1
<b>Place(s) of production</b>	Aalborg, Denmark
<b>CPC code</b>	3744

### The International EPD System

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterization factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

## EPD INFORMATION

The EPD owner has the sole ownership, liability, and responsibility for the EPD. Construction products EPDs may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context

<b>EPD program operator</b>	The International EPD System
<b>EPD standards</b>	This EPD is in accordance with EN 15804+A2 and ISO 14025 standards.
<b>Product category rules</b>	EN 15804 +A2 serves as the core PCR. In addition, the Int'l EPD System PCR 2019:14 Construction products, version 1.3.4 (2024-04-30) and c-PCR 001 Cement & building lime (2024-04-30) is used.
<b>EN 15804 reference package</b>	LCIA characterisation factors using EF 3.1 for CFs used in the PEF framework
<b>EPD author</b>	Morten Frederiksen, Aalborg Portland A/S
<b>EPD verification</b>	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal certification <input checked="" type="checkbox"/> External verification
<b>Verification date</b>	11.04.2025
<b>EPD verifier</b>	Stefan Emil Danielsson, SDG Consulting
<b>EPD number</b>	EPD-IES-0021592
<b>ECO Platform nr.</b>	
<b>Publishing date</b>	11.04.2025
<b>EPD valid until</b>	11.04.2030

# PRODUCT INFORMATION

## PRODUCT DESCRIPTION

The Aalborg White D-Carb® is a CEM II/A-LL 52,5 R is characterized by a very high early strength and high late strength. Aalborg White D-Carb® is produced by co-milling white cement clinker with limestone & gypsum.

## PRODUCT APPLICATION

Cement products are intended for preparation of concrete, mortar, grout and other mixes for construction and manufacture of construction products. Aalborg WHITE D-Carb® cement can be used in most environmental classes according to national concrete regulations.

## TECHNICAL SPECIFICATIONS AND PHYSICAL PROPERTIES OF THE PRODUCT

Product sheet for the cement can be retrieved here:

<https://www.aalborgportland.dk/downloads/ydeevnedeklarationer/>

Further information can be found at [www.aalborgportland.dk](http://www.aalborgportland.dk)

## PRODUCT STANDARDS

The Aalborg WHITE D-Carb® cement is manufactured according to the requirements in the European standard [EN 197-1](#)

## PRODUCT RAW MATERIAL COMPOSITION

Product and Packaging Material	Weight, kg	Post-consumer %	Renewable %	Country Region of origin
Clinker	800 - 940	0	0	Denmark, Europe
Limestone	60 - 200	0	0	Denmark
Other constituents	0 - 50	0	0	

## PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	<2	Europe, World
Minerals	98	Denmark
Fossil materials	0	-
Bio-based materials	0	-

## SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1% (1000 ppm).

## PRODUCT LIFE-CYCLE

### MANUFACTURING AND PACKAGING (A1-A3)

Portland-composite cement is made by heating, in a cement kiln, a mixture of raw materials (mainly limestone or chalk) to a calcining temperature of above 600°C and then a fusion temperature, which is about 1450°C to sinter the materials into grey clinker. The clinker production process is a so-called semi-wet process due to the wet limestone used. To achieve the desired properties in the finished cement, gypsum is added to the clinker and the mixture is finely ground with limestone.

### TRANSPORT AND INSTALLATION (A4-A5)

Cement is an intermediate product – typically used in construction of buildings or infrastructure. Distribution is done by ship from plant harbour to silo terminals and then by truck to local customers. Transportation burden will vary significantly depending on the point of delivery and should be modelled separately for each cement consumer. Consequently, burdens from transportation are not declared in this EPD.


### PRODUCT USE AND MAINTENANCE (B1-B7)

As it is unknown which application cement is eventually used for, no other lifecycle phases are relevant to cover, and they are marked as “Modules Not Relevant”.

### PRODUCT END OF LIFE (C1-C4, D)

The end-of-life modules (C1-C4, and D) are omitted as the material fulfils the exemption criteria based on EN 15804+A2.

## PRODUCT SYSTEM

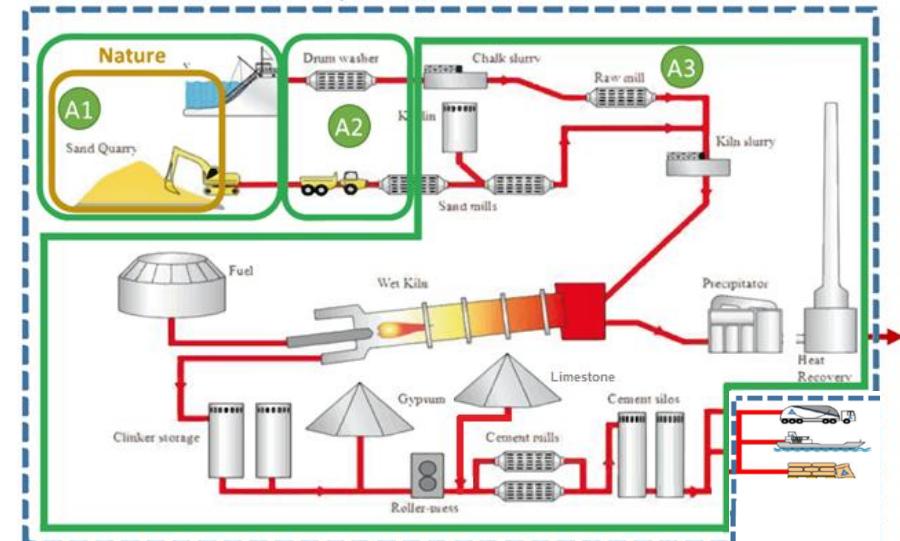

# LIFE-CYCLE ASSESSMENT

## LIFE-CYCLE ASSESSMENT INFORMATION

Period for data	2024
Declared unit	1000 kg Aalborg WHITE D-Carb® cement
Mass per declared unit	1000 kg
Database and LCA software	GCCA EPD Tool for Cement and Concrete (v5.1), International Version Ecoinvent 3.10.1

## BIOGENIC CARBON CONTENT

The product does not have biogenic carbon content.

## SYSTEM BOUNDARY

This EPD covers cradle-to-gate scope with following modules; A1 (Raw material supply), A2 (Transport) and A3 (Manufacturing). As cement is an intermediate product, no other lifecycle phases are relevant to cover.

*Not declared = ND*

A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	D	D
Global	Global	DK																
x	x	x	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

## CUT-OFF CRITERIA

The data quality is generally high as most are retrieved directly from the Manufacturer data systems. All major raw materials and essential energy flows are included. The 1% cut-off rule does not apply for hazardous materials and substances: as such, all flows with environmental significance are included. All solid waste emissions, including those that weight less than 1% of the sum of the masses of the inputs, are reported in the end-results.

## LCA APPROACH APPLIED

Aalborg Portland is utilizing waste fuels to reduce consumption of virgin primary fuels. Since the waste fuels are «legally defined as waste when used» and «the use is permitted national waste legislation» the burdens from combustion are excluded. This «Net approach» is according to the “polluters pay” principle and EN16908 Annex D. For transparency and to comply with users preferring «Gross approach» the GWP results including burdens from waste is provided in foot note.

Waste and secondary materials are utilized by mineral recovery in the clinker and cement production, whereby the need for virgin resources is reduced and deposit burdens avoided. The inbound transport of secondary materials is reflected, but the Production of materials is considered Zero-burden due to waste status or neglectable economic value compared to primary output generated. This is aligned with guidelines in EN16908 chapter 6.4.3.3. Co-products in cement.

LCA is based on primary data from manufacturer and external partners. When primary data is not available, recent generic data from Ecoinvent 3.10.1 (2024) is used.

The white Portland clinker production is jointly supplying heat to the local district heat system. The excess heat recovery unit that operates together with the production of white clinker supplies over 1,2 million GJ of heat to the district heat system of the Municipality of Aalborg (Denmark). This represents about one fifth of the local heat demand. In this particular case, an equivalent amount of burden from the clinker production is attributed to the exported heat by means of energy allocation, thus leaving the product system of the white cement.

## AVERAGES AND VARIABILITY

EPD is based on plant specific data covering a full calendar year to eliminate risk of seasonality impact and random fluctuations. Burdens from internal clinker production is assigned to cement according to clinker factor.

Minor inputs such as waste handling and internal transport is averaged over all clinker production, since no specific data was available.

## The International EPD System additional data requirements

Data specificity and GWP-GHG variability for GWP-GHG for A1-A3.

Supply-chain specific data for GWP-GHG	95 %
Variation in GWP-GHG between products	n/a
Variation in GWP-GHG between sites	n/a

## ENVIRONMENTAL IMPACT DATA

*Note: The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.*

### CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Potential, total (net)*	kg CO <sub>2</sub> -eq	7,74E+02	ND													
Global Warming Potential, fossil (net)*	kg CO <sub>2</sub> -eq	7,73E+02	ND													
Global Warming Potential, biogenic (net)*	kg CO <sub>2</sub> -eq	2,46E-02	ND													
Global Warming Potential, land use and land use change	kg CO <sub>2</sub> -eq	3,86E-02	ND													
Depletion potential of the stratospheric ozone layer	kg CFC11-eq	6,86E-06	ND													
Acidification potential, Accumulated Exceedance	mol H <sup>+</sup> -eq	3,39E+00	ND													
Eutrophication potential, fraction of nutrients reaching freshwater end compartment	kg PO <sub>4</sub> -eq	2,51E-03	ND													
Eutrophication potential, fraction of nutrients reaching marine end compartment	kg N-eq	1,58E-01	ND													
Eutrophication potential, Accumulated Exceedance	mol N-eq	8,45E+00	ND													
Formation potential of tropospheric ozone	kg NMVOC-eq	2,60E+00	ND													
Abiotic depletion potential for non-fossil resources**	kg Sb-eq	1,81E-03	ND													
Abiotic depletion potential for fossil resources potential**	MJ	7,08E+03	ND													
Water (user) deprivation potential, deprivation-weighted water consumption**	m <sup>3</sup> -eq depr.	2,23E+01	ND													

\* The indicated values (net values) do not include the greenhouse gas emissions from the incineration of secondary fuels at clinker production. The gross GWP-tot (including the emissions from the incineration of secondary fuels at clinker production) is 775.6 kg CO<sub>2</sub>-eq. The gross GWP-fos is 775.4 kg CO<sub>2</sub>-eq. The gross GWP-bio is 0.1305 kg CO<sub>2</sub>-eq.

\*\*EN 15804+A2 disclaimer for Abiotic depletion and Water use indicators and all optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

## ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Potential incidence of disease due to PM emissions	Incidence	3,14E-05	ND													
Potential Human exposure efficiency relative to U235	kBq U235-eq	7,83E+01	ND													
Potential Comparative Toxic Unit for ecosystems	CTU-eq	8,78E+03	ND													
Potential Comparative Toxic Unit for humans - cancer	CTUh	1,55E-06	ND													
Potential Comparative Toxic Unit for humans - non-cancer	CTUh	6,29E-05	ND													
Potential soil quality index	dimensionless	5,28E+02	ND													

EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

## USE OF NATURAL RESOURCES

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Use of renewable primary energy excl. renewable primary energy resources used as raw materials	MJ	4,29E+01	ND													
Use of renewable primary energy resources used as raw materials	MJ	0,00E+00	ND													
Total use of renewable primary energy resources	MJ	4,29E+01	ND													
Use of non-renewable primary energy excl. non-renewable primary energy res. used as raw mat.	MJ	7,08E+03	ND													
Use of non-renewable primary energy resources used as raw materials	MJ	0,00E+00	ND													
Total use of non-renewable primary energy resources	MJ	7,08E+03	ND													
Use of secondary materials	kg	1,72E+01	ND													
Use of renewable secondary fuels	MJ	2,94E+02	ND													
Use of non-renewable secondary fuels	MJ	0,00E+00	ND													
Net use of fresh water	m <sup>3</sup>	6,44E-01	ND													

## END OF LIFE – WASTE

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	5,63E-02	ND													
Non-hazardous waste	kg	9,89E+00	ND													
Radioactive waste	kg	1,76E-02	ND													

## END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0,00E+00	ND													
Materials for recycling	kg	2,40E+00	ND													
Materials for energy recovery	kg	9,01E-02	ND													
Exported energy	MJ	0,00E+00	ND													

## ENVIRONMENTAL IMPACTS – GWP-GHG - THE INTERNATIONAL EPD SYSTEM

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG (net)*	kg CO <sub>2</sub> -eq	7,74E+02	ND													

\* The indicated values (net values) do not include the greenhouse gas emissions from the incineration of secondary fuels at clinker production. The gross GWP-GHG (including the emissions from the incineration of secondary fuels at clinker production) is 775.6 kg CO<sub>2</sub>-eq. GWP-GHG indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO<sub>2</sub> is set to zero.

## SCENARIO DOCUMENTATION

### Manufacturing energy scenario documentation

Scenario parameter	Value
Electricity data source and quality	100% GoO certified electricity (Wind + Nuclear). Modelled using emission factors in GCCA EPD tool
Electricity gram CO <sub>2</sub> -eq / kWh	22 g/kWh
District heating data source and quality	n/a
District heating CO <sub>2</sub> -eq / kWh	n/a

### End of life scenario documentation

Scenario parameter	Value
Collection process – kg collected separately	n/a
Collection process – kg collected with mixed waste	n/a
Recovery process – kg for re-use	n/a
Recovery process – kg for recycling	n/a
Recovery process – kg for energy recovery	n/a
Disposal (total) – kg for final deposition	n/a
Scenario assumptions e.g. transportation	n/a

### Transport scenario documentation

Scenario parameter	Value
Transport, freight, lorry 16-32 tonnes, EURO 6, kg CO <sub>2</sub> -eq / t-km	n/a
Transport, freight, sea, bulk carrier for dry goods, kg CO <sub>2</sub> -eq / t-km	n/a
A4 average transport CO <sub>2</sub> -eq emissions, kg CO <sub>2</sub> -eq / t-km	n/a
A4 average transport distance, km	n/a
Transport capacity utilization, %	n/a
Bulk density of transported products, kg/m <sup>3</sup>	n/a
Volume capacity utilization factor for nested package products, %	n/a

## BIBLIOGRAPHY

ISO 14025:2010 Environmental labels and declarations – Type III environmental declarations. Principles and procedures.

ISO 14040:2006 Environmental management. Life cycle assessment. Principles and frameworks.

ISO 14044:2006 Environmental management. Life cycle assessment. Requirements and guidelines.

GCCA EPD tool database incl. Ecoinvent database v3.10.1.

EN 15804:2012+A2:2019 Sustainability in construction works – Environmental product declarations – Core rules for the product category of construction products.

IES PCR 2019:14 Construction products, version 1.3.4 (2024-04-30) is used.  
c-PCR 001 Cement & building lime



## ABOUT THE MANUFACTURER

Aalborg Portland is the only cement factory in Denmark. The past 135 years it has been producing high quality grey and white cement from multiple kilns, where the main clinker raw material, limestone and sand, is sourced locally. Since 2004 it is owned by Cementir Group along with 10 other cement factories globally. The annual cement production exceeds 2 million tons sold in domestic and regional markets. The distribution is based on silo terminal across Denmark and Europe. Aalborg Portland proactively pursuing decarbonisation of cements, while maintaining a high performance in target applications. The latest examples are FutureCEM® (2020), SOLID (2021) and White D-Carb® (2024).

## EPD AUTHOR AND CONTRIBUTORS

<b>Manufacturer</b>	Aalborg Portland, Cementir Holding
<b>EPD author</b>	Morten Frederiksen, Aalborg Portland A/S, Denmark
<b>EPD verifier</b>	Stefan Emil Danielsson, SDG Consulting
<b>EPD program operator</b>	The International EPD System
<b>Background data</b>	This EPD is based GCCA EPD tool v 5.1 incl. Ecoinvent v.3.10.1
<b>LCA software</b>	The LCA and EPD have been created using GCCA Industry EPD Tool for Cement and Concrete (v5.1), International Version - Pre-Verified for International EPD System

# VERIFICATION STATEMENT

## VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliancy with EN 15804, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The background report (project report) for this EPD

## VERIFICATION OVERVIEW

Following independent third party has verified this specific EPD:

EPD verification information	Answer
Independent EPD verifier	Stefan Emil Danielsson, SDG Consulting
EPD verification started on	10.04.2025
EPD verification completed on	11.04.2025
Supply-chain specific data %	95%
Approver of the EPD verifier	The International EPD System

Author & tool verification	Answer
EPD author	Morten Frederiksen
EPD author training completion	31.05.2023
EPD Generator module	GCCA EPD Tool for Cement and Concrete (v5.0), International Version
Independent software verifier	Rillo & Pretato, Studio Fieschi & soci Srl.
Software verification date	11.11.2024

## VERIFICATION AND REGISTRATION (ENVIRONDEC)

ISO standard ISO 21930 and CEN standard EN 15804 serves as the core Product Category Rules (PCR)	
PCR	PCR 2019:14 Construction products, version 1.34
PCR review was conducted by:	The Technical Committee of the International EPD® System. See <a href="http://www.environdec.com/TC">www.environdec.com/TC</a> for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat <a href="http://www.environdec.com/contact">www.environdec.com/contact</a> .
Independent third-party verification of the declaration and data, according to ISO 14025:2006:	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal certification <input checked="" type="checkbox"/> External verification
Third party verifier	Stefan Emil Danielsson, SDG Consulting
	Approved by: The International EPD® System Technical Committee, supported by the Secretariat
Procedure for follow-up during EPD validity involves third party verifier	<input type="checkbox"/> yes <input checked="" type="checkbox"/> no



EPD International AB, Box 210 60, SE-100 31 Stockholm, Sweden,  
 E-mail: [info@.environdec.com](mailto:info@.environdec.com)